
OPA

Ceiling Speaker C8215S

Quick Installation Guide



Package List



C8215S Ceiling
Speaker (1 pcs)




Card slot cardboard
(1 pcs)


► English ◀

Installation Method


- 1 Use a tool to open a circular installation hole with a diameter of 200mm in the ceiling.



- 2 Connect the audio input connector according to the below the instructions.
- 3 Remove the grille; install the product into the pre-cut hole on the ceiling and tighten the screws; then reattach the grille.
- 4 Ensure that the device is properly installed and securely fixed.

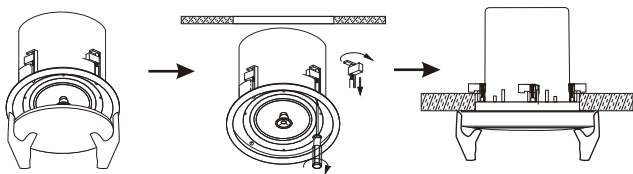


Interfaces and Instructions

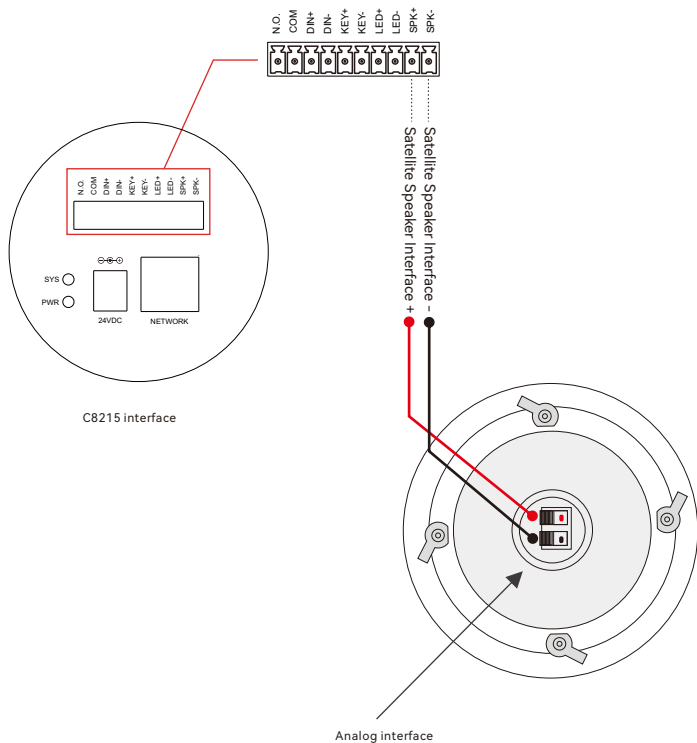


中文

安装方式


- ① 用工具在天花板上开一个直径为200mm的安装圆孔。



- ② 如下图指引所示从网络音箱连接音频输入线。
- ③ 将产品网拆出；按预先开好的孔将产品安装到天花板上，并拧上螺丝；将网重新装上。
- ④ 确保设备安装到位并且牢固可靠。

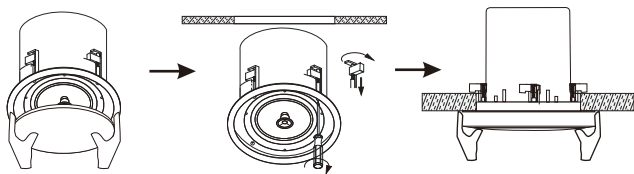

接口和说明

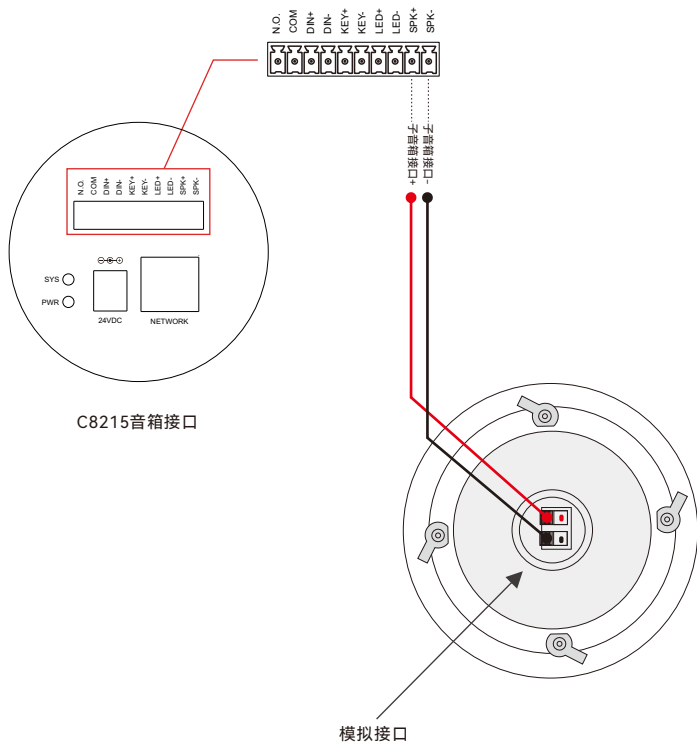



OPA Co., Ltd

www.odmpa.com